BROAN® Elite

Under-Cabinet

SPIRE

Broan Elite brings you Spire, an exciting new shape in a pro-style hood. It's high efficiency ensures energy savings while you enjoy pro-style performance. The LED modules included with this hood are the latest in LED cooktop illumination technology specially designed to operate in the elevated temperatures of cooking - offering bright lighting and lasting up to 25 times as long as a standard bulb and greater reliability than typical replacement LED bulbs.

SIZE	STAINLESS	GREASE FILTERS (replacement)	NON-DUCTED FILTERS
30-in.	EPLEC130SS	HPFA424 (Type "B5")	HPF24 (Type "Xb")
36-in.	EPLEC136SS	HPFA430 (Type "C5")	HPF30 (Type "Xc")
42-in.	EPLEC142SS	HPFA436 (Type "D5")	HPF36 (Type "Xd")
48-in.	EPLEC148SS *	HPFA442 (Type "E5")	HPF42 (Type "Xe")

* Not available in Canada.

PERFORMANCE								
Duct Orientation	Size	Damper	Sones			CFM		
			Normal	Medium	High	Normal	Medium	High
Vertical - Rectangular	3¼-in. x 14-in.	Included	0.8	2.5	9.0	180	265	540
Horizontal - Rectangular	3¼-in. x 14-in.	Included	0.8	2.5	10.0	180	275	600
Round - Vertical	7-in.	Sold Separately	0.8	2.5	10.0	175	245	500

FEATURES	
Control type	3-speed Capacitive Touch
Delay off	no
Filter Clean Reminder	yes
Heat Sentry™	no
ADA Capable	yes
Lighting	2-level ENERGY STAR® LED (included)
Grease Filters	Hybrid Baffle (Qty. 2)
Installation Hardware	EZ1 Brackets
ENERGY STAR®	no
Recirculation	Non-ducted filters sold separately
3¼-in x 10-in Damper/Duct Connector	included
AC INPUT	
120V, 60 Hz - 1.9 AMPS	
OPTIONAL ACCESSORIES	
7-in. Round Damper	BP87Q
ADA Wiring Kit	HAWRK3
Make-up Air Damper	MD6TU, MD8TU or MD10TU
MOUNTING HEIGHT	
24-in. to 30-in. from cooktop to bottom of hood	
LIMITED WARRANTY	
1-year 3-year (LED modules only) *(See installation manual for full warranty text.)*	
FOR INDOOR USE ONLY	

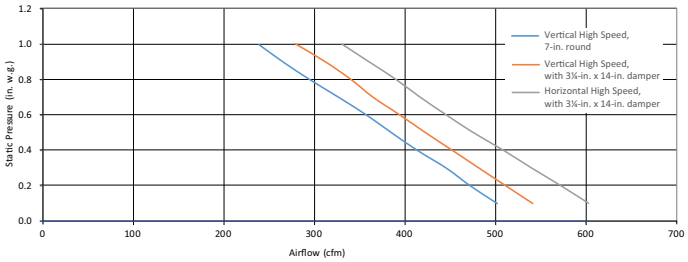

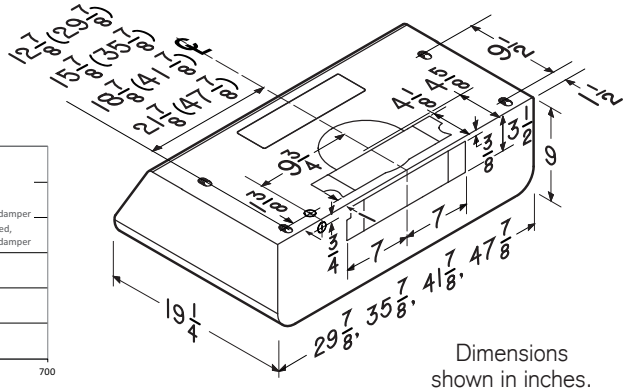

Dimensions shown in inches.

This product was tested by Broan-NuTone for airflow performance using the ANSI/AMCA 210 Standard, which is equivalent to the Home Ventilating Institute HVI 916 - Procedure for Air Flow Testing, and tested for sound performance using the ANSI S12.51 Standard, which is equivalent to the Home Ventilating Institute HVI 915 - Procedure for Loudness Rating of Residential Fan Products.

SPECIFICATION SHEET

SPIRE - EPLEC1 SERIES

Broan-NuTone LLC | 926 West State Street, Hartford, WI 53027 | 1 800-558-1711 | www.broan.com
Broan-NuTone Canada ULC | 1140 Tristar Drive Mississauga, Ontario Canada L5T 1H9 | 1 888-882-7626 | www.broan.ca

BROAN® Elite

Hottes conventionnelles

SPIRE

Broan Elite vous propose Spire, une forme remarquablement nouvelle dans une hotte de style professionnel. Son efficacité élevée assure des économies d'énergie tout en profitant de performances professionnelles. Les modules DEL étant issus de la plus récente technologie en matière d'éclairage de surface de cuisson, ils sont spécialement conçus pour fonctionner dans un environnement à chaleur élevée. Leur durabilité est jusqu'à 25 fois supérieure à celle des ampoules standards et ils sont plus robustes que les ampoules à DEL typiques.

LARGEUR	INOX	FILTRES À GRAISSES (remplacement)	FILTRES DE RECIRCULATION
30 po	EPLEC130SS	HPFA424 (Type "B5")	HPF24 (Type "Xb")
36 po	EPLEC136SS	HPFA430 (Type "C5")	HPF30 (Type "Xc")
42 po	EPLEC142SS	HPFA436 (Type "D5")	HPF36 (Type "Xd")
48 po	EPLEC148SS *	HPFA442 (Type "E5")	HPF42 (Type "Xe")

* Non offert au Canada.

RENDEMENT

Orientation du conduit	Largeur	Volet	Sones			pi³/min		
			Normale	Moyenne	Haute	Normale	Moyenne	Haute
Rectangulaire vertical	3¼ po x 14 po	inclus	0,8	2,5	9,0	180	265	540
Rectangulaire horizontal	3¼ po x 14 po	inclus	0,8	2,5	10,0	180	275	600
Rond vertical	7 po	vendu séparément	0,8	2,5	10,0	175	245	500

CARACTÉRISTIQUES	
Type de commande	Capacitive, à 3 vitesses
Arrêt différé	non
Rappel d'entretien des filtres	oui
Détecteur Heat Sentry[MC]	non
Capacité ADA	oui
Éclairage	DEL ENERGY STAR® à 2 intensités (inclus)
Filtres à graisses	Hybrides / à déflecteur (qté 2)
Matériel pour l'installation	Supports EZ1
ENERGY STAR®	non
Recirculation	Filtres de recirculation vendus séparément
Clapet/raccord de conduit 3¼ po x 10 po	inclus
ALIMENTATION CA	
120 V, 60 Hz - 1,9 A	
ACCESSOIRES OPTIONNELS	
Volet rond de 7 po	BP87Q
Ensemble de câblage ADA	HAWRK3
Dispositif d'apport d'air	MD6TU, MD8TU ou MD10TU
HAUTEUR DE MONTAGE	
De 24 po à 30 po au-dessus de la surface de cuisson	
GARANTIE LIMITÉE	
1 an, 3 ans (modules DEL seulement) *(Voir le manuel d'installation pour le texte complet de la garantie.)*	
POUR UTILISATION À L'INTÉRIEUR SEULEMENT	

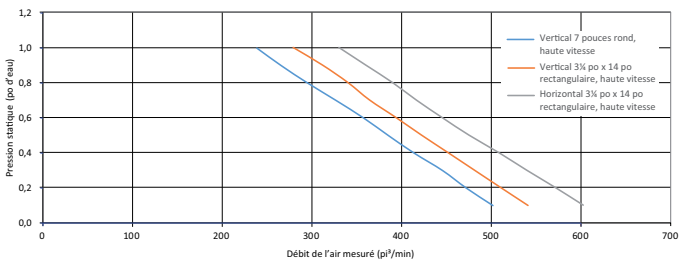

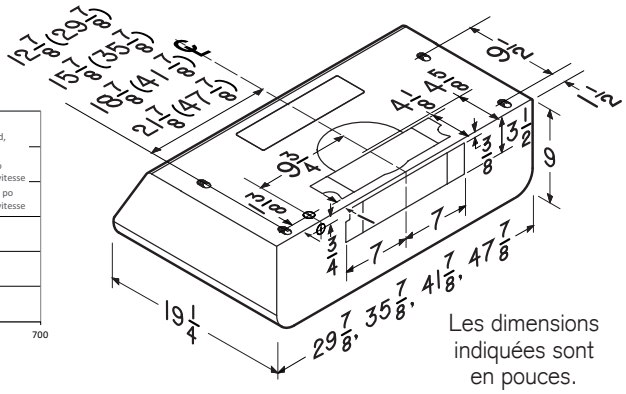

Les dimensions indiquées sont en pouces.

Le rendement de ce produit en terme de débit d'air a été testé par Broan-NuTone selon la norme ANSI/AMCA 210, équivalant à la norme Home Ventilating Institute HVI 916 - Procédure d'essai de débit d'air, et a été testé pour sa performance sonore selon la norme ANSI S12.51, équivalant à la norme Home Ventilating Institute HVI 915 - Procédure d'évaluation de l'intensité sonore des produits de ventilation résidentielle.

Broan-NuTone LLC | 926 West State Street, Hartford, WI 53027 | 1 800-558-1711 | www.broan.com
Broan-NuTone Canada ULC | 1140 Tristar Drive Mississauga, Ontario Canada L5T 1H9 | 1 888 882-7626 | www.broan.ca

FICHE TECHNIQUE

SPIRE - SÉRIE EPLEC1