



A sleek, low-profile design enhanced by a dazzling new finish. Create a signature look and focal point in any personalized kitchen with this stunning black stainless chimney hood.

FEATURES	
Control type	3-speed Capacitive Touch
Delay off	no
Filter Clean Reminder	yes
Heat Sentry™	no
ADA Capable	no
Lighting	2-level halogen (included)
Grease Filters	Micro Mesh (Qty. 2)
Installation Hardware	Included
ENERGY STAR®	no
Duct Size	Vertical 6" round or 3¼" x 10" Horizontal 3¼" x 10"
AC INPUT	
120V, 60 Hz - 4.8 AMPS	
OPTIONAL ACCESSORIES	
Flue extension for 10-ft ceilings	FXE54BLS
Non-duct kit	HRKMBLS
Non-duct filters	FILTERECM (Qty. 2)
Air flow reducer for 6" round adapter	ARP6
Air flow reducer for 3¼" x 10"	ARP310
MOUNTING HEIGHT	
24-in. to 30-in. from cooktop to bottom of hood	
LIMITED WARRANTY	
1-year See installation manual for full warranty text.	
FOR INDOOR USE ONLY	

SIZE	BLACK STAINLESS	GREASE FILTERS (replacement)
30-in.	EW5430BLS	99010355
36-in.	EW5436BLS	99010355

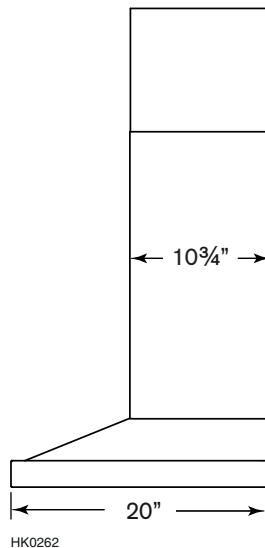

HK0262

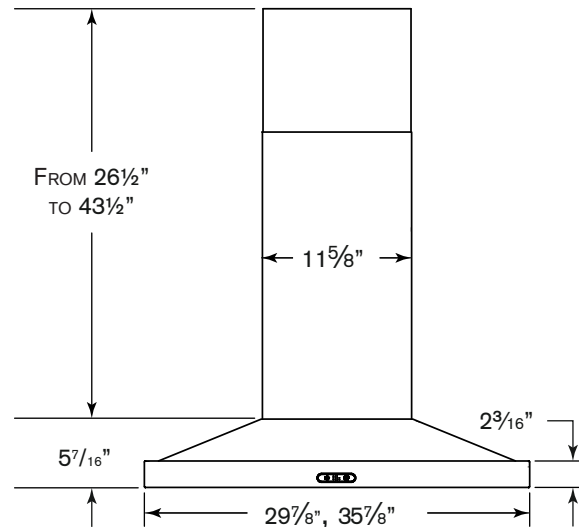

SPECIFICATION SHEET  
**EW54 SERIES**



Broan-NuTone LLC

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

EW54d180323


| 926 West State Street, Hartford, WI 53027

| 1-888-336-3948

| www.broan.com

PERFORMANCE						
Duct Orientation	Size	Damper	Sones		CFM @ 0.1 Ps	
			Working Speed	High speed	Working Speed	High speed
Vertical	3¼-in. x 10-in.	Included	1.4	11.5	200	550
Vertical	6-in. round	Included	1.5	12	180	500
Horizontal	3¼-in. x 10-in.	Included	1.3	10.5	180	500

Airflow Performance at Working Speed

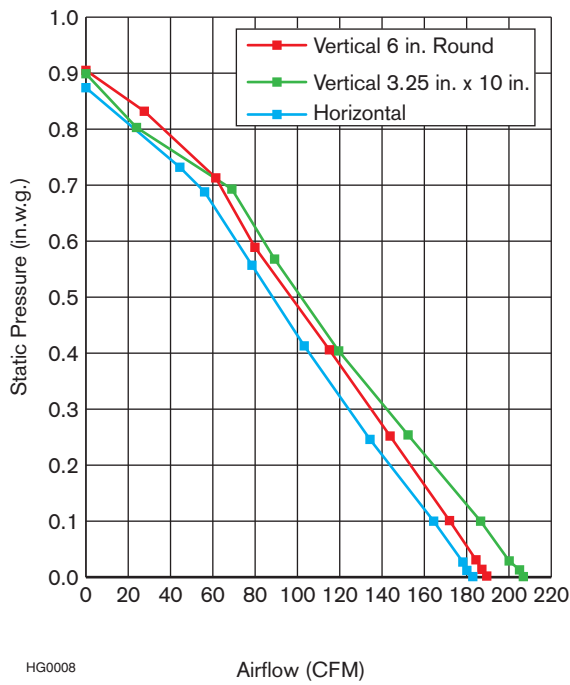

Airflow Performance at High Speed

