

Gas Rangetop, 48"

Series 9 | professional

Stainless Steel | LPG




Eight burners for when you need maximum performance and cooktop space - great for those who love to cook for a crowd.

- Your burners can deliver anything from very high 23,500 BTU heat for seriously fast boiling, to the most gentle flame for simmering
- Continuous surface grates designed for pots and pans to move safely across the cooktop

DIMENSIONS

Height	8 ⁵ / ₁₆ "
Width	47 ⁷ / ₈ "
Depth	28 "

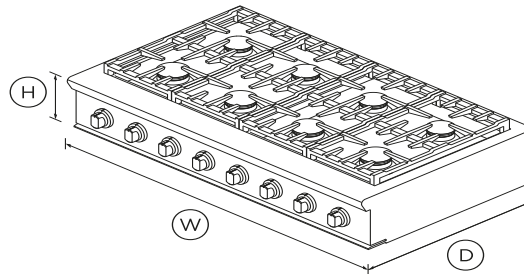

FEATURES & BENEFITS

Perfect heat

Sealed Dual Flow Burners™ deliver rangetop power up to 23,500 BTU (NG models) for seriously fast boiling right down to a precise 140°F full surface simmer with the gentlest of flames.

Precise control

From the highest to the lowest temperatures you get total control with halo-illuminated rangetop dials. A precise full surface simmer is delivered across all burners.

Cooking flexibility

The continuous surface grates are designed for pots and pans to move safely across the rangetop. Full coverage, deep-platform style grates are designed so heat goes directly onto the pot rather than the grates themselves, for a faster boil and energy efficiency.

Information at a glance

LED halo control dials provide information at a glance and assist in alerting you if any burners are accidentally left on.

Easy cleaning

These rangetops have sealed burners and a single sheet cooking surface which, combined with a commercial-style stainless steel finish and dishwasher-safe grates, allow easy cleaning.

Complementary Design

Built to last with distinctive, bold styling, this rangetop is designed to match the Fisher & Paykel Professional style family of appliances.

SPECIFICATIONS

Burner ratings

Back centre	1850BTU
Back centre (2)	1850BTU
Back left	1850BTU
Back right	1850BTU
Front centre	1850BTU
Front centre (2)	1850BTU
Front left	2350BTU
Front right	2350BTU

Cleaning

- Dishwasher proof trivets
- Sealed range top

SKU 71384

Controls

- Metal dials
- Metal illuminated dials

Performance

Maximum burner power	23500BTU
Sealed Dual Flow Burners™	8
Simmer on all burners	140°F
Total cooktop power	158000BTU

Power requirements

Amperage	15A
Electric circuit	3 wire
Supply frequency	60Hz
Supply voltage	120V

Product dimensions

Depth	28 "
Height	8 ⁵/₁₆ "
Width	47 ⁷/₈ "

Recommended Ventilation





Minimum CFM	1200
Pro hood	VS48

Warranty

Parts and labor	Limited 2 Years Parts & Labor
-----------------	--

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2019.

Other product downloads available at fisherpaykel.com

-  [User Guide](#)
-  [Service & Warranty Booklet](#)
-  [Installation Guide](#)
-  [Resources \(zip\)](#)



A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support

T 1300 650 590 W www.fisherpaykel.com