

# UVW9301SL/BL

## Universal 30" Wall-Mount Glass Canopy Chimney Hood

### DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

#### INSTALLATION INFORMATION:

Before installing, consult Use & Care/installation instructions packed with product for current dimensional data.

#### OPTIONAL ACCESSORIES



UX12DC93SS/TS - 12(ft.) Ceiling Duct Cover Kit  
Max ceiling height installation with kit - 12'-0" (30" hood spacing)

UX14DC93SS/TS - 14(ft.) Ceiling Duct Cover Kit  
Max ceiling height installation with kit - 14'-0"

UXCF91 - Charcoal Filter (needed if used in recirculation mode)

UXRC1 - Remote Control (Wireless)

AMP RATING	
120V	TBD

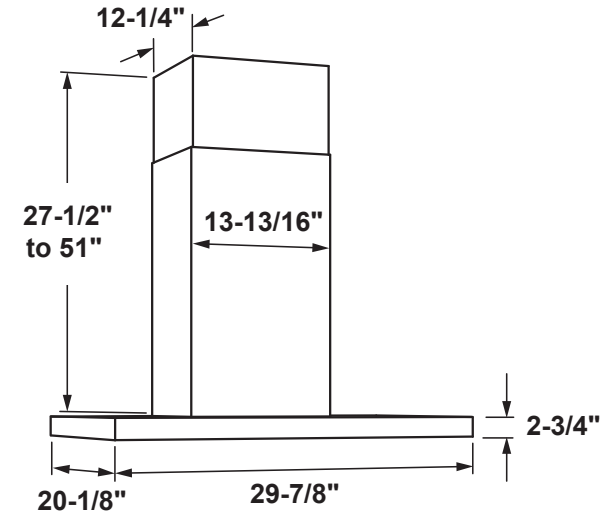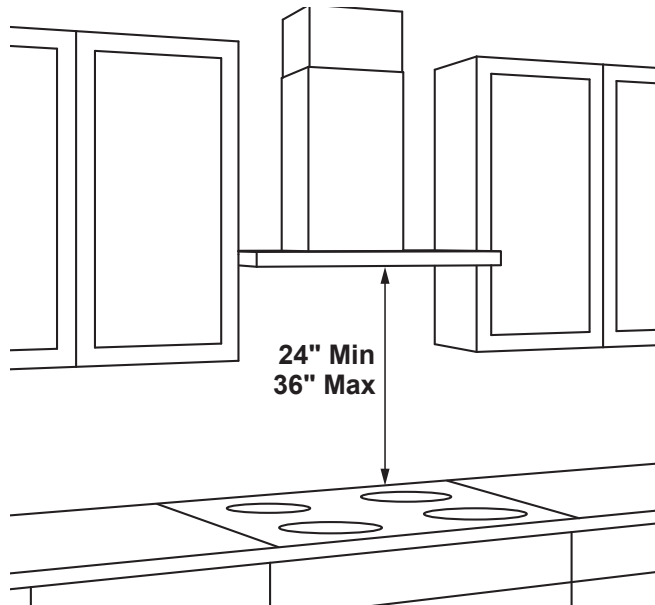

30" models require a 30"-wide opening  
\*The supplied duct cover fits 7'-7" to 10'-6" ceiling heights  
(12' ceiling height with optional high ceiling kit UX12DC93SS/UX12DC93TS)  
(14' ceiling height with optional high ceiling kit UX14DC93SS/UX14DC93TS)

The vent hood must be installed 24" min. above the cooking surface. For optimal performance, installing the hood more than 36" above the cooking surface is not recommended. The hood installation height above the cooking surface depends upon ceiling height. The telescopic duct cover conceals the ductwork running from the top of the hood to the ceiling.

NOTE: Installation height should be measured from the cooking surface to the lowest part of the hood. This hood may be installed onto a wall and vented to the outdoors, or it can be installed for recirculating operation. Parts for recirculating operation are supplied with the hood.



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Specification Revised 11/17

# UVW9301SL/BL

## Universal 30" Wall-Mount Glass Canopy Chimney Hood

### FEATURES AND BENEFITS

Adjustable CFM blower – Blower power can be adjusted between 400 and 600 CFMs to accommodate installation needs

LED backlit glass touch control – Attractive controls are easy to read and instantly wipe clean

Perimeter venting – Improves performance by increasing the capture area beyond the edges of the range or cooktop

Triple LED dimmable lighting-bulbs included – LED modules ensure bright lighting for the entire cooking environment

10-ft. ceiling height – Included duct cover extensions reach up to 10' ceilings and work with optional accessories to reach up to 14' ceilings

WiFi Connect – Control appliances with a smart device or just the sound of your voice

Hidden filter venting – This visually-pleasing feature conceals the filters behind a smooth cover

Timer and clock – Enjoy the convenience of a bright display at the ideal height


Chef Connect – Automatically control the hood's lights and fan by syncing with the range

Four-speed fan control – Helps draw smoke, grease, odors and moisture out of the kitchen air

Optional remote control – Activate and adjust your hood functions from anywhere in the kitchen

Model UVW9301SLSS – Stainless steel

Model UVW9301BLTS – Black stainless

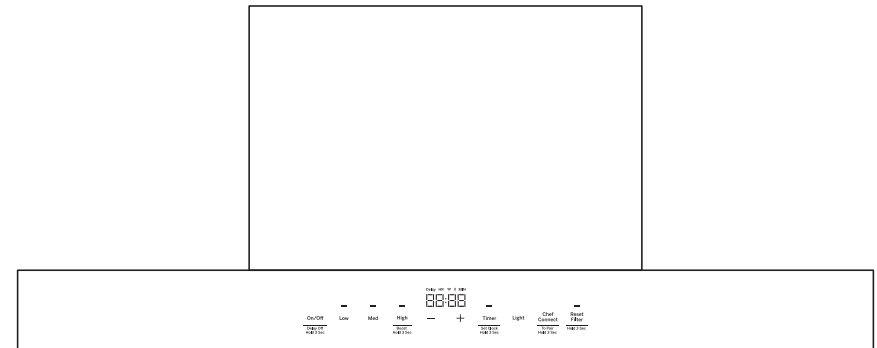

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.