

## PUR 88 W

30-inch wall-mounted ventilation hood  
with energy-efficient LED lighting and backlit controls for easy use.



- Timeless design - 29 1/2 (748)Inch wide stainless steel ventilation hood
- Efficient filtration- 10-ply stainless steel grease filters
- Safe and easy to clean - Miele CleanCover
- Suitable for every home - vented or recirculating

EAN: 4002515941638 / material number: 10743170

|   |                     |
|---|---------------------|
| <b>Construction type</b>  |                     |
| Wall ventilation hood   | •                   |
| <b>Design</b>   |                     |
| Color   | Stainless steel     |
| RAL color possible as special order   | •                   |
| Customization possible on request   | •                   |
| <b>Operating modes</b>  |                     |
| Recirculated mode   | Convertible         |
| OdorFree charcoal filter (order separately)   | DKF12-900           |
| <b>Control panel</b>  |                     |
| Electronic controls   | •                   |
| Light-touch controls  | •                   |
| Power levels (number excl. Intensive)   | 3                   |
| Intensive setting   | •                   |
| Programmable 'Intensive' switch-off   | •                   |
| <b>Cleaning convenience</b>   |                     |
| Easy-to-clean CleanCover hood liner   | •                   |
| <b>Filter system</b>  |                     |
| Number of dishwasher-safe stainless steel grease filters                                | 2                   |
| <b>Lighting</b>   |                     |
| LED ClearView lighting  | •                   |
| Light intensity in Lx   | 330                 |
| Color temperature in K  | 3,000               |
| <b>Blower</b>   |                     |
| Dual-action blower  | •                   |
| AC motor  | •                   |
| <b>Air throughput with max. duct diameter in vented mode (not for external version)</b> |                     |
| Air throughput  | Values upon request |
| <b>Safety</b>   |                     |
| Safety shut-off   | •                   |
| <b>Technical data</b>   |                     |
| Overall hood height for vented and external in in.(mm)                                  | 27 (685)            |
| Overall hood height for recirculation in in.(mm)  | 32 1/8 (815)        |
| Canopy width in in.(mm)   | 29 1/2 (748)        |
| Height of hood canopy in in.(mm)  | 2 1/2 (62)          |
| Depth of hood canopy in in.(mm)   | 19 3/4 (500)        |
| Minimum distance above electric cooktops in in.(mm)                                     | 24 1/8 (610)        |
| Minimum height above gas cooktop (max. 12.6 kW total power, burner 4.5 kW) in mm        | 26 (660)            |
| Net weight in lbs. (kg)   | 51 (23.0)           |
| Length of electrical wire in ft (m)   | 4 (1.5)             |
| Standard plug fitted  | •                   |
| Total connected load in kW  | 0.36                |
| Voltage in V  | 120                 |
| Fuse rating in A  | 15                  |
| Number of phases  | 1                   |
| <b>Installation notes</b>   |                     |
| Vent connection at top  | •                   |
| Vent connection at top and rear   | •                   |
| Diameter of vent connection in in.(mm)  | 6 (150)             |
| Telescopic chimney  | •                   |

More information at [www.MieleUSA.com](http://www.MieleUSA.com)

For further information please see next page...

PUR 88 W


30-inch wall-mounted ventilation hood  
with energy-efficient LED lighting and backlit controls for easy use.



| Standard accessories         |   |
|------------------------------|---|
| Non-return flap              | • |
| Reducer from 150 to 125 mm Ø | • |

## PUR 88 W

30-inch wall-mounted ventilation hood with energy-efficient LED lighting and backlit controls for easy use.

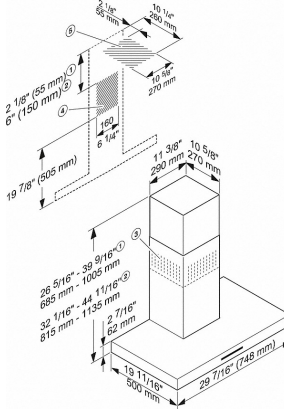

PUR 88 W (Installation drawing) - USA/CDN

- 1) Extraction
- 2) Recirculation
- 3) Ventilation grille at top for recirculation
- 4+5) Installation cut-out (5 not required for recirculation)