

# 30" (76.2 cm) and 36" (91.4 cm) Range Hood

## PRODUCT MODEL NUMBERS

UXT2030AD

**Electrical:** A 120 volt, 60 Hz., AC only, 15-amp, fused electrical circuit is required.


## VENTING METHODS

**NOTES:** Flexible vent is not recommended. Flexible vent creates both back pressure and air turbulence that greatly reduce performance.

- Flexible vent is not recommended. Flexible vent creates both back pressure and air turbulence that greatly reduce performance.
- The vent system is optional for this model.


Vent system can terminate either through the roof or wall. Use 7" (17.8 cm) or larger round vent with a maximum length of 50 ft (15.2 m) for vent system.

### Top Venting



- A. 7" (17.8 cm) round vent through roof (purchased separately).  
 B. Roof cap with damper (purchased separately)

### Wall Venting



- A. 7" (17.8 cm) round vent out the top and through the wall (purchased separately).  
 B. Wall cap with damper (purchased separately)

## Calculating Vent System Length


To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.

### Vent System

#### Vent Piece

45° elbow	2.5 ft (0.8 m)	
90° elbow	5.0 ft (1.5 m)	
7" (17.8 cm) wall cap	0.0 ft (0.0 m)	

## Example vent system

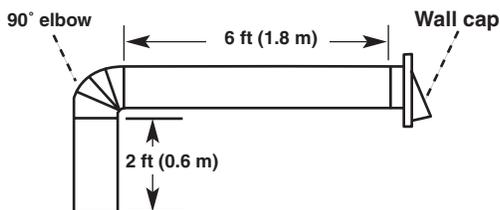


1 - 90° elbow	= 5.0 ft (1.5 m)
1 - wall cap	= 0.0 ft (0.0 m)
8 ft (2.4 m) straight	= 8.0 ft (2.4 m)
System length	= 13.0 ft (3.9 m)


## Maximum Recommended Length

7" (17.8 cm) Round Vent = 50 ft (15.2 m)

## PRODUCT DIMENSIONS

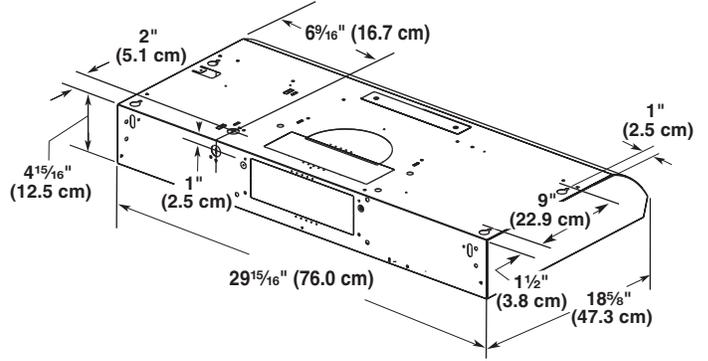

## Installation Clearances

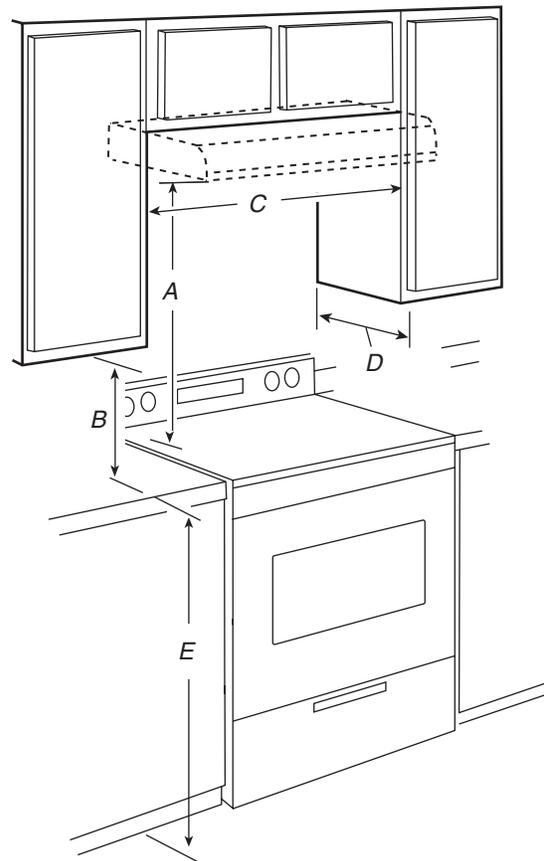

- A. 18" (45.7 cm) minimum distance from electric cooking surface.  
 24" (61.0 cm) minimum distance from gas cooking surface.  
 30" (76.2 cm) suggested maximum above the cooking surface.  
 B. 18" (45.7 cm) minimum clearance - upper cabinet to countertop.  
 C. 30" (76.2 cm) minimum cabinet opening width.  
 D. 12" (30.5 cm) cabinet depth.  
 E. 36" (91.4 cm) base cabinet height.