

Installation Instructions


GPF65 Side Mounting Brackets

PARTS SUPPLIED WITH KIT

- 2 Side mounting brackets with 4 mounting screws




Side Mounting Brackets



4, #8 Pan head Phillips Screws 1/2" long for side mounting


PARTS SUPPLIED WITH DISHWASHER



2 Wood mounting screws

TOOLS YOU WILL NEED:

- Phillips head screwdriver
- Measuring tape
- Safety glasses
- Gloves
- Drill and 1/8" Bit



Measuring Tape

Safety Glasses

STEP 1 PREPARING DISHWASHER

- Turn off water supply.
- Turn off electrical power supply.


CAUTION

On new installations, do not remove wood base until you are ready to install the dishwasher or it will tip over when the door is opened.


STEP 2 ATTACHING BRACKETS

Use the method shown according to your dishwasher style.

METHOD A INSTALLING BRACKETS ON MODELS WITH LONG DOOR AND TOEKICK

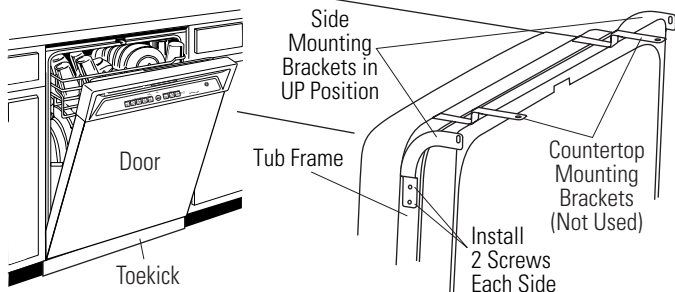

METHOD B INSTALLING BRACKETS ON MODELS WITH SHORT DOOR, ACCESS PANEL AND TOEKICK

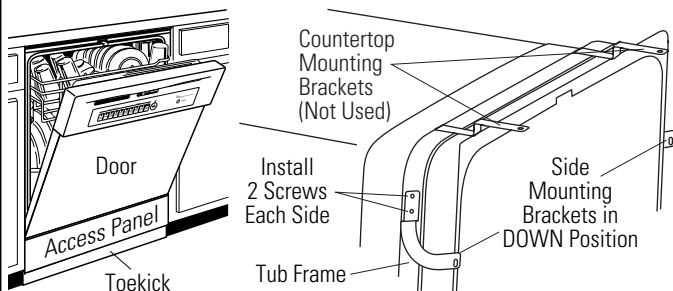


- Pull dishwasher out of the opening just enough to access the tub frame.
- Fasten a side mounting bracket to each side of the tub frame with the #8 pan head screws provided. The bracket should be installed, as shown for your model.

STEP 3 SECURE DISHWASHER TO CABINETRY

IMPORTANT: When sliding dishwasher into cabinet, be sure Side Mounting Brackets do not hit cabinets on left and right sides.

- Models using Method A, position the dishwasher so that the door lines up with the front face of adjacent cabinets.
- Models using Method B, position the dishwasher so that the wood mounting screw, as it passes through the slot in the side mounting bracket, will hit the center of the cabinet wood.
- Drill 1/8" dia. pilot holes, 1/2" deep into adjacent cabinets.

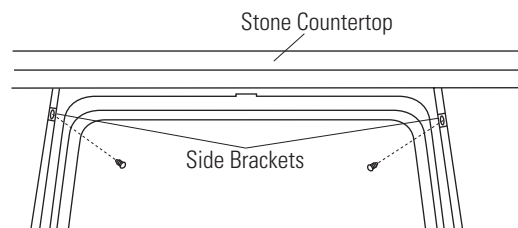

- Fasten the brackets to the cabinet sides using the 2 Phillips head wood mounting screws.
- IMPORTANT:** Drive screws straight and flush. Protruding screw heads may scratch the top or sides of the control panel and can interfere with door closing.

